


REV	REVISIONS	DATE	APPROVED
1	NEW DESIGN	2021.12.23	

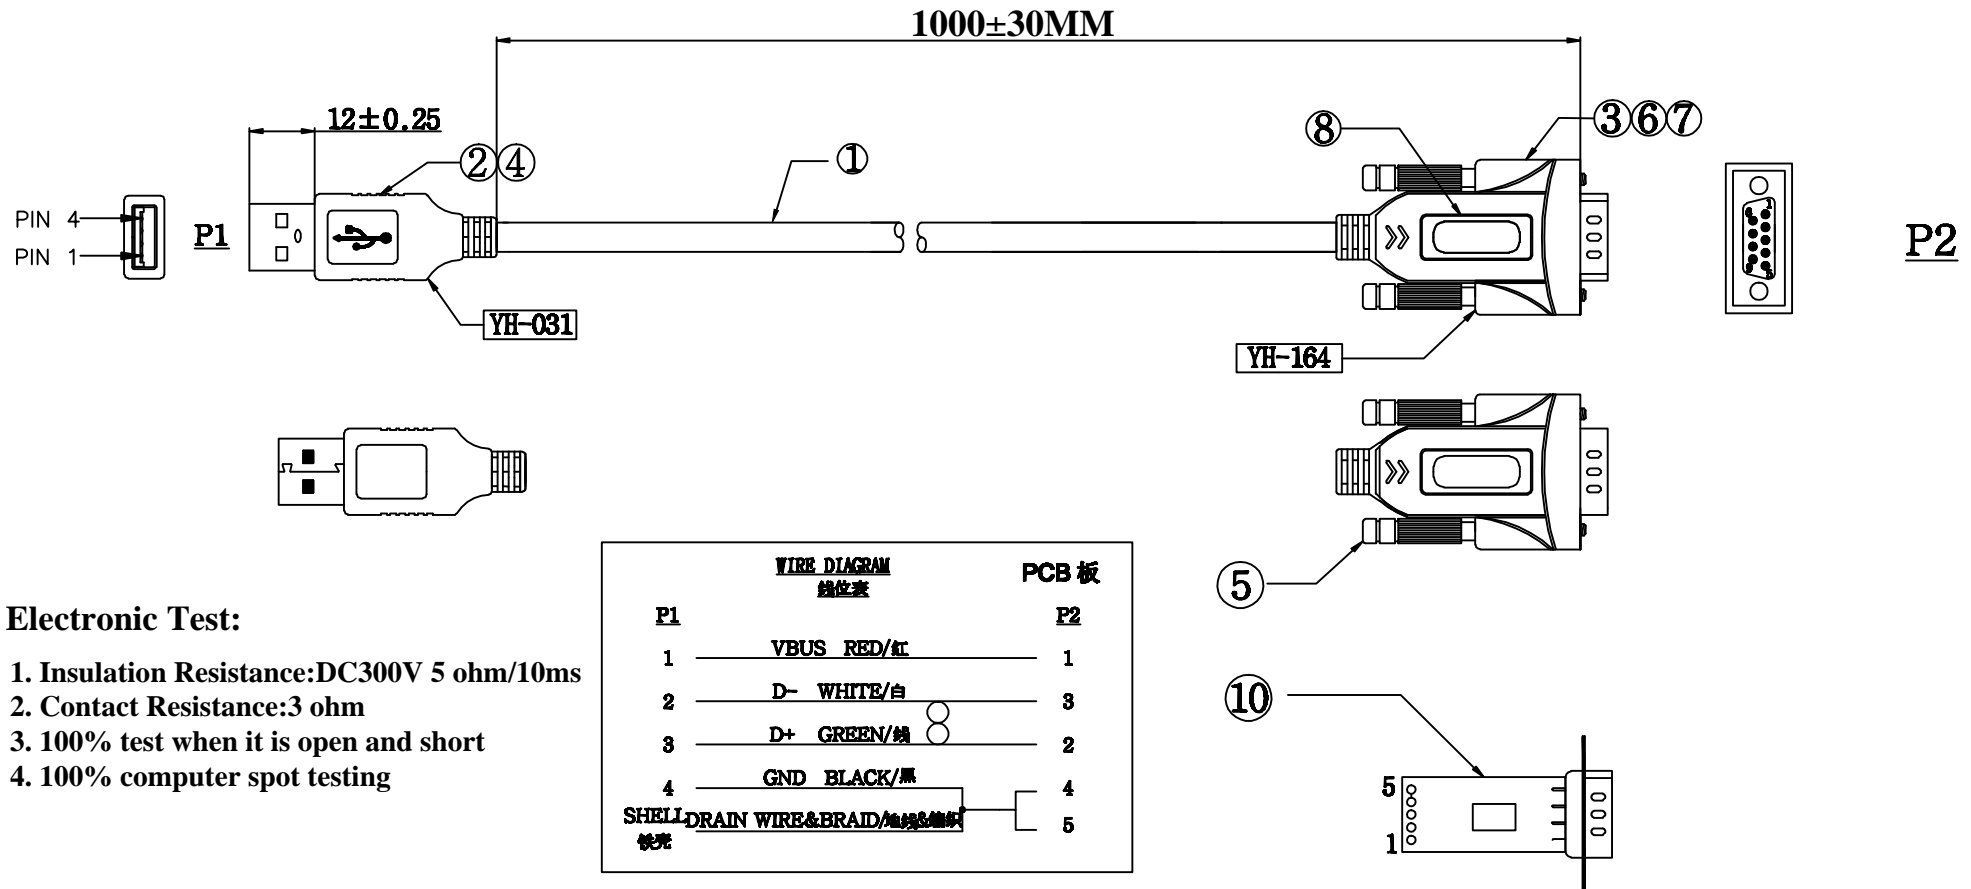

Electronic Test:

1. Insulation Resistance:DC300V 5 ohm/10ms
2. Contact Resistance:3 ohm
3. 100% test when it is open and short
4. 100% computer spot testing

WIRE DIAGRAM 线位表		PCB板
P1		P2
1	VBUS RED/红	1
2	D- WHITE/白	3
3	D+ GREEN/绿	2
4	GND BLACK/黑	4
	SHELL DRAIN WIRE&BRAID/外壳与编织线 铁壳	5

8	Black LOGO(YH-262)		
7	PCB Board+(FT232RL)	1	PCS
6	PVC 35P Transparent Black Plastic Material + Black Female		
5	Screw(2.3*45.5) YH-086 45P Black	2	PCS
4	PVC 45P Black		
3	DB9P/M White Contact Nickel Plated	1	PCS
2	USB2.0 A/M Nickel Plated	1	PCS
1	UL2725#28AWG*1P*24AWG*2C+AEB(80/0.12AM) OD=5.0MM Outer Jacket: PVC Black 65P		
序号	Item	Q'TY	UNIT
NO	SPECTIFICATIONS		

LUCOM									
Item	FTDI USB 2.0 TO DB9 P/M			A	Page	1/1	Scale		
Draw No				P/N	62.09.8263		Angle		
Customer							Drawer	LIZIXING	
Size	A4	Unit	MM	Date	2021.12.23		Approval		