



DisplayPort20P M/HDMI-19M

Item	Prepared by	Date	Version	Content
1	* + ,	2010/11/19	A	Original drawing

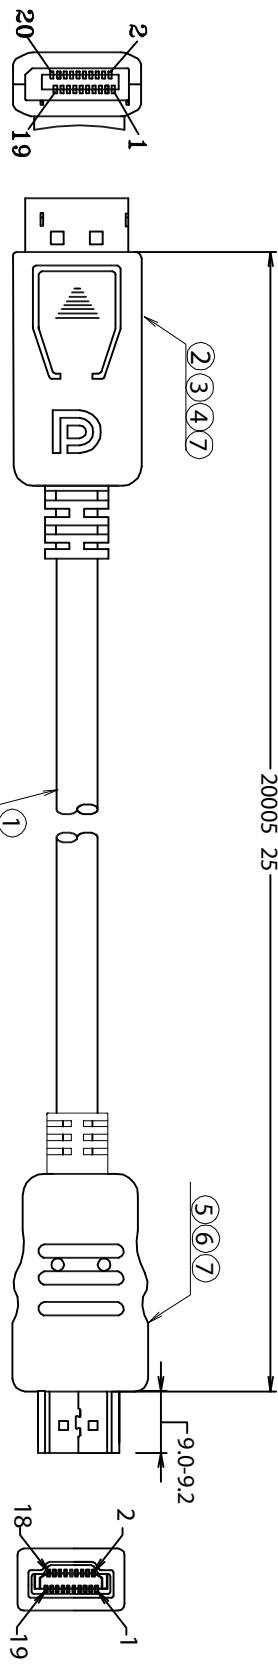

1. Pin assignment:

CONN1	CONN2	CONN1	CONN2
1 white	1 white	10 white	10 white
2 red	2 red	11 green	12 green
3 drain	3 drain	12 drain	11 drain
4 white	4 white	13 pink	13 pink
5 brown	5 brown	14 white	14 white
6 drain	6 drain	15 yellow	15 yellow
7 white	7 white	16 orange	16 orange
8 orchid	8 orchid	17 red	17 red
9 drain	9 drain	18 grey	18 grey
		19 purple	19 purple
		G drain	G drain




- Note: Pay attention to symbol 1 must point at the first pin of DP20P connector.
2. Electric test condition:
 A. Voltage: DC 300V
 B. Insulation Impedance: 2 10MΩ
 C. Conductive Impedance: 4 33
- Above test only apply for CONN2 side.
 Finished goods must be tested by HDTV equipment.

3. Mold No. List.

NAME	TYPE	MOLD NO.
HDMI19M	Inside	CV-224-07
	Outside	CV-224-08
SR	Outside	CV-644-02

4. Package:

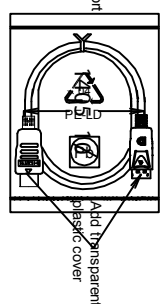

DLOCK
 we move the world

Item no. **82586**

Barcode: 4043619825868

File: 88062

NO.	PART NO.	DESCRIPTION	QTY	UNIT
①	wire	UL20276 (28AWG(7/0.127T/A)*1P+AE(7/0.127T/A)*MM*4+28AWG(7/0.127T/A)*1P+28AWG(7/0.127T/A)*5C+AE(7/0.127T/A)*B(6*5/0.12AC)(50%AL braid) OD:7.3 Color:black HIGH SPEED HDMI CABLE L=2000mm(RoHS)	1	PC
②	Connector	Display port 20PIN PL UE ASSEMBLY plug black insulation without PC board metal shell & Pin golden-plated RoHS!	1	PC
③	PCB	CV-141 double side PC board RoHS!	1	PC
④	Outside shell	DisplayPort 20P/M up and down assembly shell color:black which apply for CV-644 SR 1 RoHS!	1	SET
⑤	Connector	HDMI-19P(M) Black insulation metal shell golden-plated Pin golden-plated (width of black insulation 13.1mm) RoHS)	1	PC
⑥	Inside	Transparent P.E material(RoHS)	1.8	g
⑦	Outside	45P black PVC material RoHS)	15	g
⑧	Poly bag	7"- 10" polybag(RoHS)	1	PC
⑨	Waterproof bag	20+16i ""28"waterproof bag RoHS)	1/70	PC
⑩	Carton	48- 40- 20cm RoHS)	1/70	carton